

PW Series

Ultrafiltration – Post treatment of RO and NF



The P-Series family of polyethersulfone ultrafiltration membrane elements are characterized by a 10,000 molecular weight cut-off and greater than 96% rejection of Cytochrome-C (13,300 MW protein). PW Elements are used for pretreatment of process water and post treatment of ultrapure water.

Table 1: Element Specification

Membrane	P-Series, Polyethersulfone
----------	----------------------------

Model	Active Area ft ² (m ²)	Outer wrap	Part Number
PW4025T	50 (4.6)	Tape	1207368
PW4040T	85 (7.9)	Tape	1207379
PW4040F	85 (7.9)	Fiberglass	1207376
PW8040F	350 (32.5)	Fiberglass	1207404

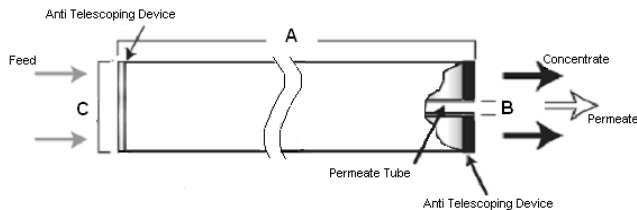


Figure 1: Element Dimensions Diagram - Female

Table 2: Dimensions and Weight

Model ¹	Dimensions, inches (cm)			Boxed Weight lbs (kg)
	A	B ²	C ³	
PW4025T	25.0 (63.5)	0.625 (1.59)	3.9 (9.9)	5 (2.3)
PW4040T	40.0 (101.6)	0.625 (1.59)	3.9 (9.9)	8 (3.5)
PW4040F	40.0 (101.6)	0.625 (1.59)	3.9 (9.9)	8 (3.5)
PW8040F	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	32 (14.5)

¹This product ships dry.

²Internal diameter unless specified OD (outside diameter).

³The element diameter (dimension C) is designed for optimum performance in GE Water & Process Technologies pressure vessels. Other pressure vessel dimension and tolerance may result in excessive bypass and loss of capacity.

Table 4: Operating and CIP parameters

Typical Operating Pressure	80-135 psig (555 – 931 kPa)
Typical Operating Flux	10-25GFD (15-40LMH)
Maximum Pressure	200 psig (1,379 kPa)
Maximum Temperature	Operating: 122°F (50°C) Cleaning: 122°F (50°C)
Recommended pH	Operating Range pH: 4.0-11.0, Cleaning Range pH: 2.0-11.5
Recommended Pressure Drop	Over an element: 12 psig (83 kPa) Per housing: 50 psig (345 kPa)
Chlorine Tolerance	5,000+ ppm-days



Find a contact near you by
visiting ge.com/water or
e-mailing custhelp@ge.com.

Global Headquarters
Trevose, PA
+1-215-355-3300

Americas
Watertown, MA
+1-617-926-2500

Europe/Middle East/Africa
Heverlee, Belgium
+32-16-40-20-00

Asia/Pacific
Shanghai, China
+86 (0) 411-8366-6489

©2007 General Electric Company. All rights reserved.

*Trademark of General Electric Company; may be registered in one or more countries.

FS1287EN Dec-07